

# PLC Theory – PLC Architecture

---




&

**UNIVERSITY  
CENTRE**

# Parts of a PLC

---


- The architecture of a PLC is split into several parts
  - Input module
  - Output module
  - CPU
  - Memory
  - Power supply

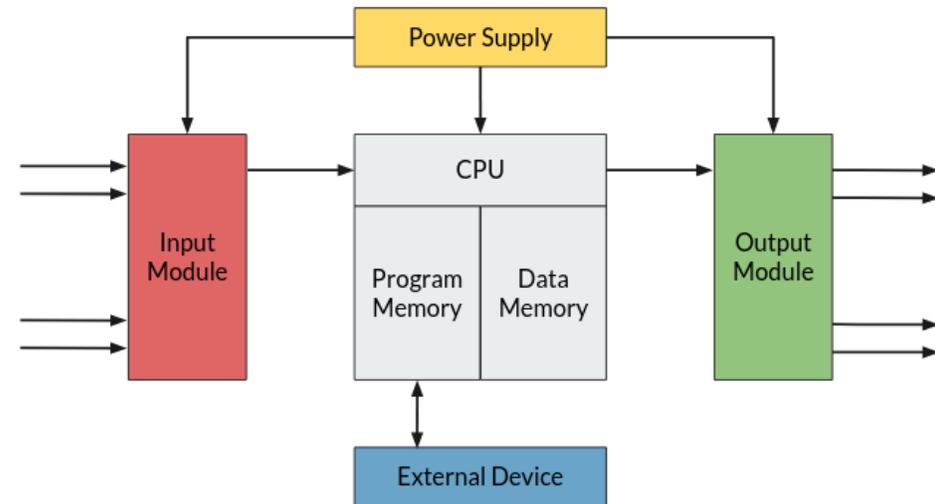

# Input module

---


- The input module takes readings from external sensors and allows the PLC to interpret them
- They have two main input types in them analogue and digital
- For analogue input they require an ADC (Analogue Digital Converter)
- Often contains built in isolation to protect the PLC from surges and interference from external devices.

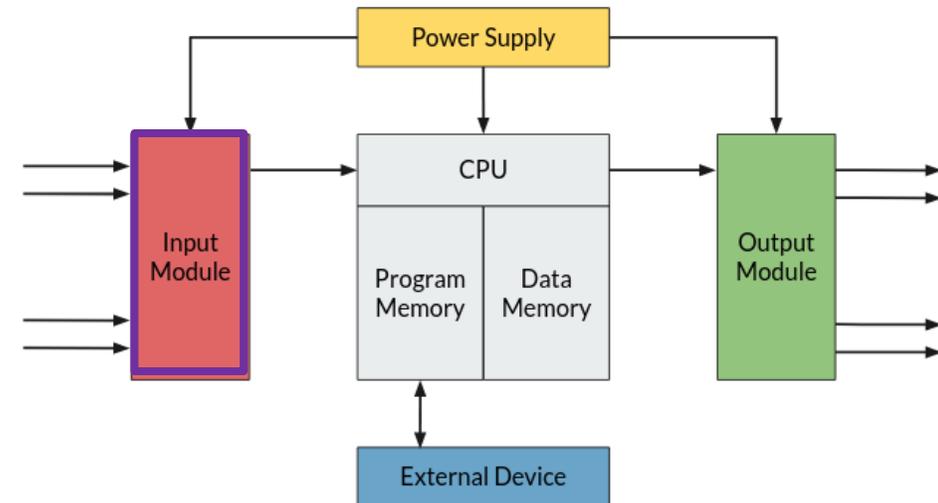

# Output module

---


- The output module sends commands out to the connected actuators
- The output will usually be a digital signal however with specialist units it can be analogue
- For analogue output they require a DAC (Digital Analogue Converter)
- Often contains built in isolation to protect the PLC from surges and interference from external devices.

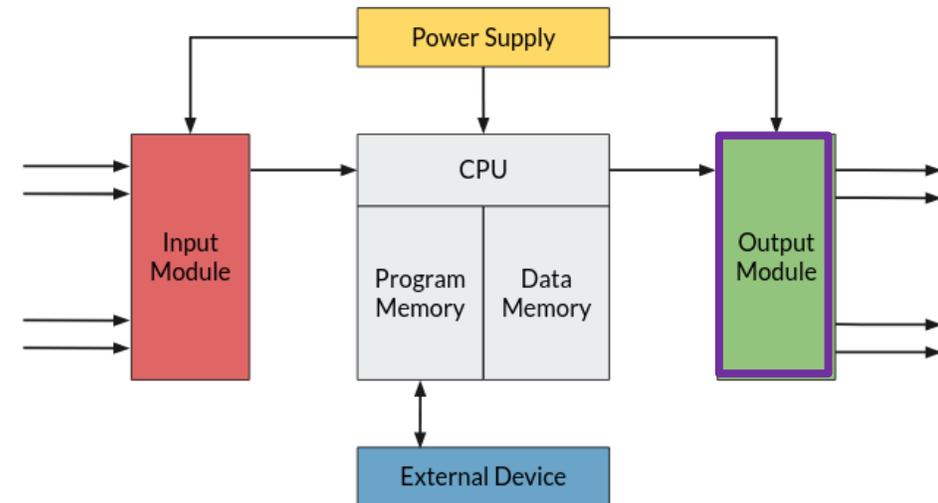

# Central Processing Unit

---


- The CPU processes the user inputted programme
- Consists of:
  - Arithmetic Logic Unit (ALU) which does calculations
  - Control Unit (CU) which directs the execution of a program
  - Clock which controls the speed at which actions happen

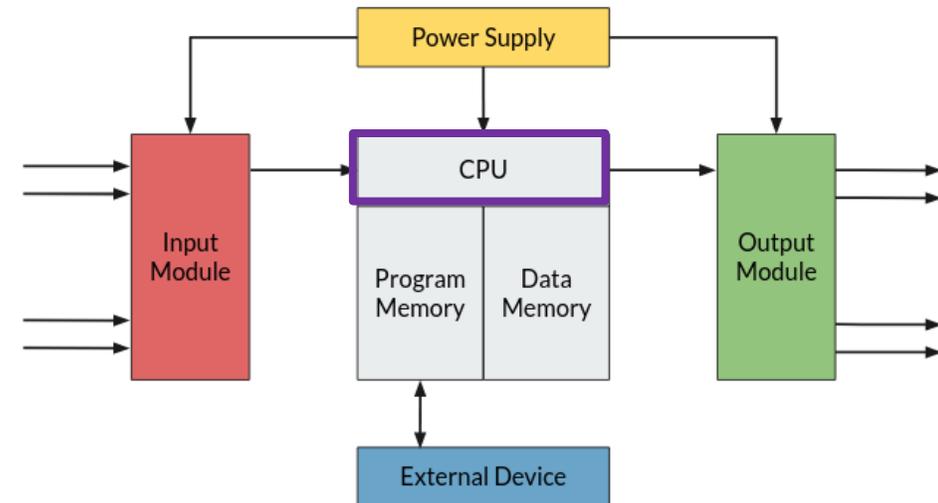

# Memory

---


- The memory holds information for the CPU to use
- It has two main forms:
  - ROM/EEPROM (Program)
  - Ram (Data)

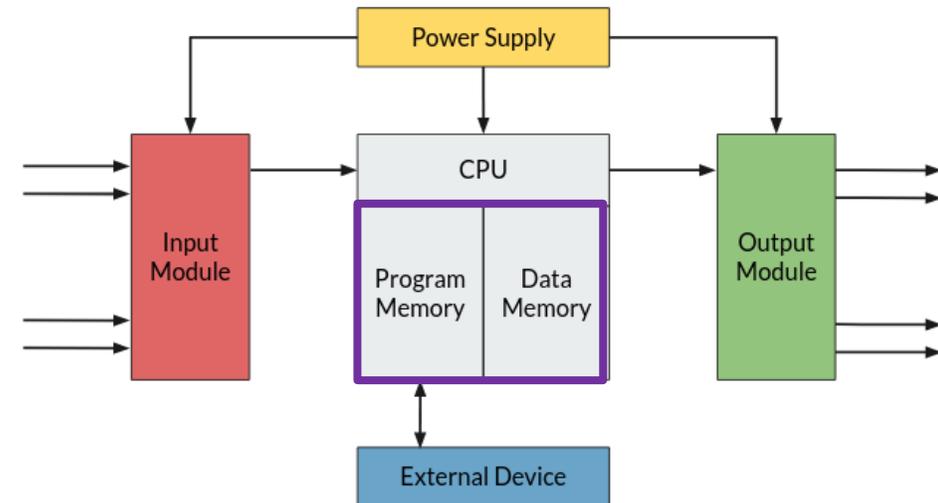

# ROM

---


- Holds the programme which the CPU will run
- Also holds any other data which needs to be permanently saved for example config files
- The ROM is non-volatile, this means that when it's turned off it keeps its data

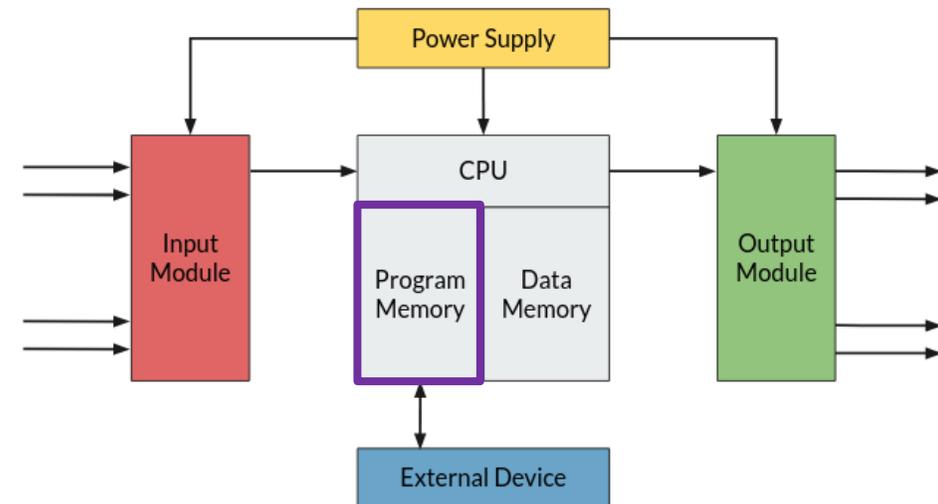

# RAM


---

- Holds any temporary data which the CPU needs
- Most often used for real-time data
- One example of this is the RAM holding input and output values

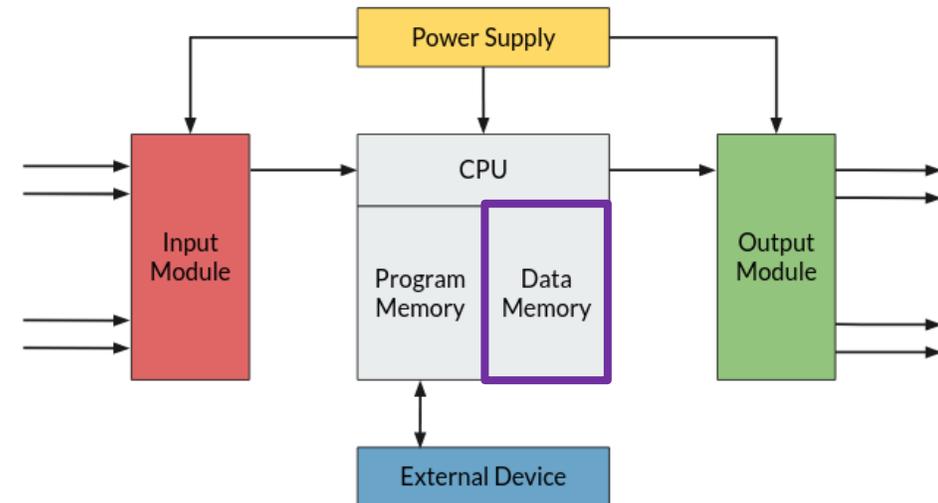

# Power supply


- Provides power for all the components inside the PLC
- Most commonly converts mains AC voltage (120/240v) into DC (24v and 5v)
- Can also commonly accept a DC 24v input directly
- It sends the 24v to the power input/output module and 5v to the cpu/memory
- Often stabilises and isolates inputted power to ensure no damage to the PLC when power spikes

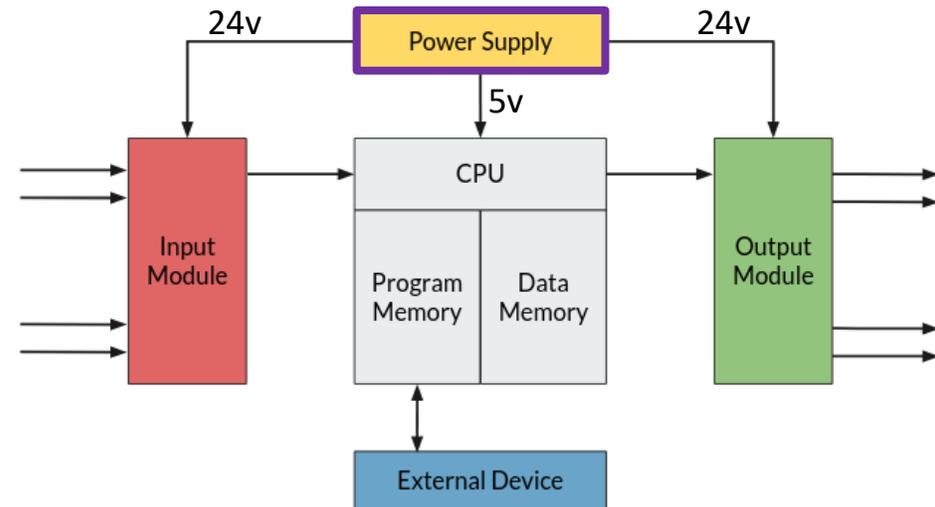

# External Device

---


- The external device or programmer is whatever we are using to program the PLC
- The programmer will have a software on it that allows it to communicate with the PLC
- At this college we use the desktops with Siemens TIA installed on them.

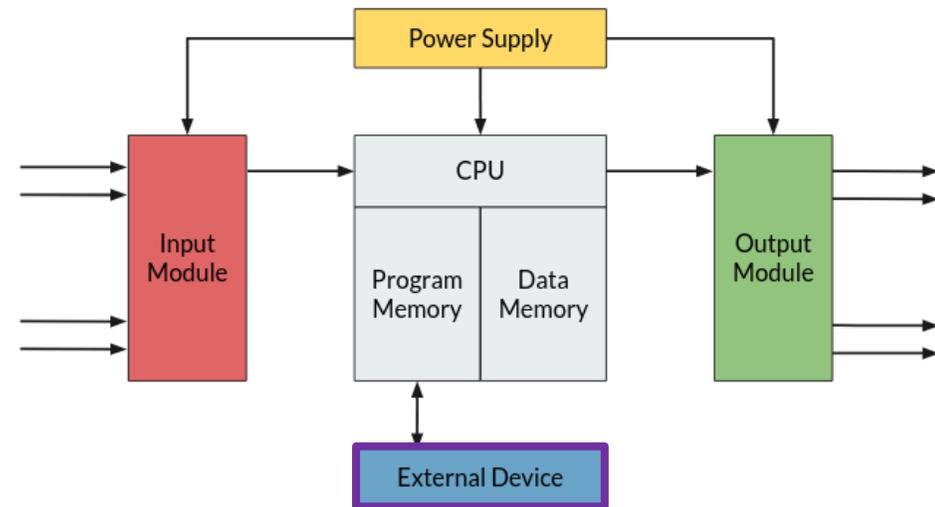

# Scan Cycle

---


- The scan cycle dictates the order in which things happen inside a PLC
- It repeats continuously whilst the PLC is on
- It consists of 5 major parts:
  - Read Inputs
  - Execute Program
  - Write to Outputs
  - Communication
  - Diagnostics

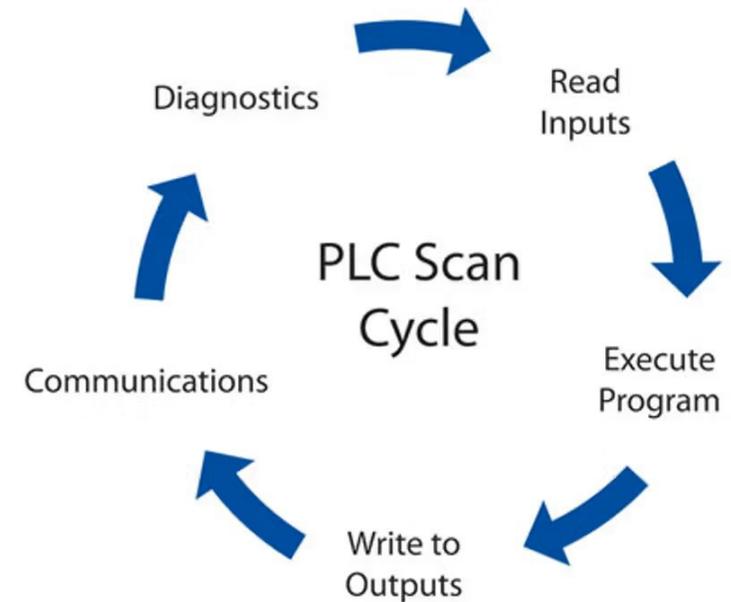

# Read Inputs

---


- PLC reads any inputs from sensors using the input module
- It then stores the values in the RAM in an image table
- This allows the PLC to keep track of the input values
- As this happens once its equivalent to a “snapshot” meaning the input values wont change mid scan

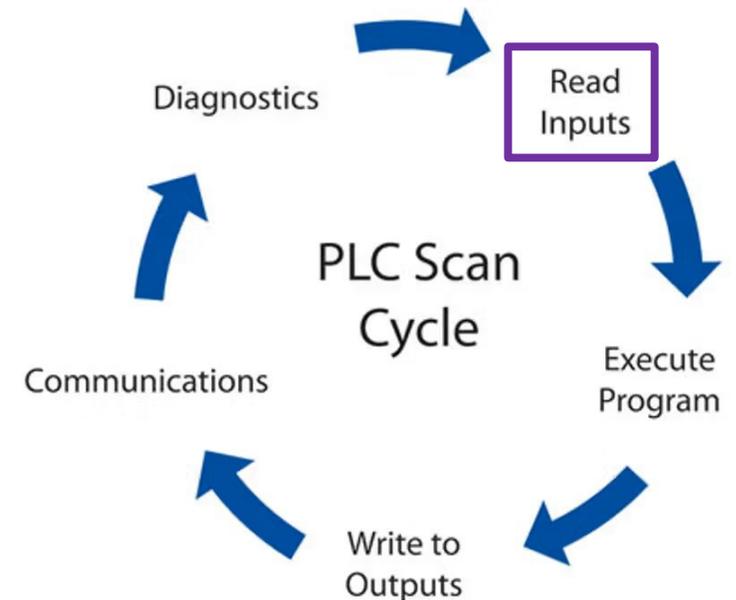

# Execute Program

---


- The CPU runs one full run through of the programmed logic from top to bottom
- It uses the values from the input scan
- It then stores outputs into the RAM image table

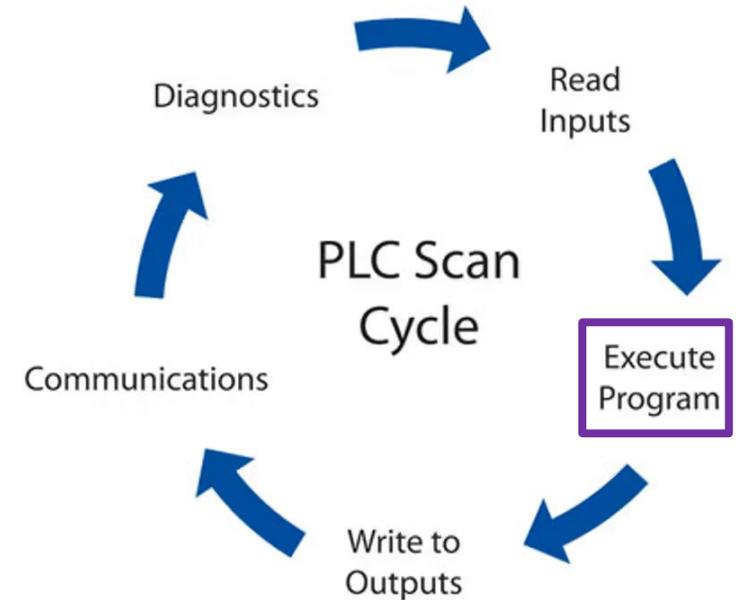

# Write to Outputs

---


- The output module updates the external components based on the values in the output image table
- These outputs stay the same till the next scan cycle

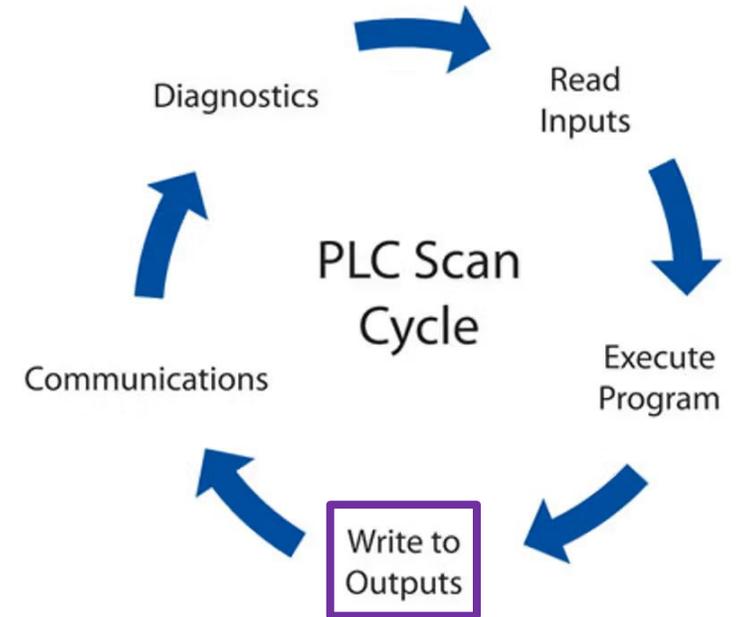

# Housekeeping

---


- Housekeeping is the general term for the steps of Diagnostic and communications
- During this step the PLC communicates any updates to any external sources including HMIs, other PLCs and Programmers
- PLC does self diagnostics to ensure everything is going well and nothing has broken
- The PLC also updates internal counters and timers

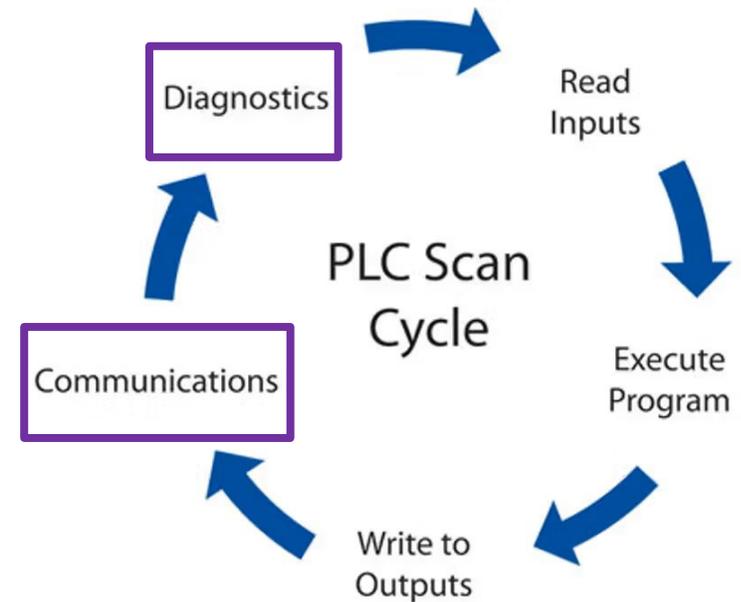

# Scan Cycle Time

---


- Several things effect the time it takes for a Scan Cycle
  - I/O
  - Logic Complexity
  - Processing Power
  - Time dependant components
  - Communication overhead

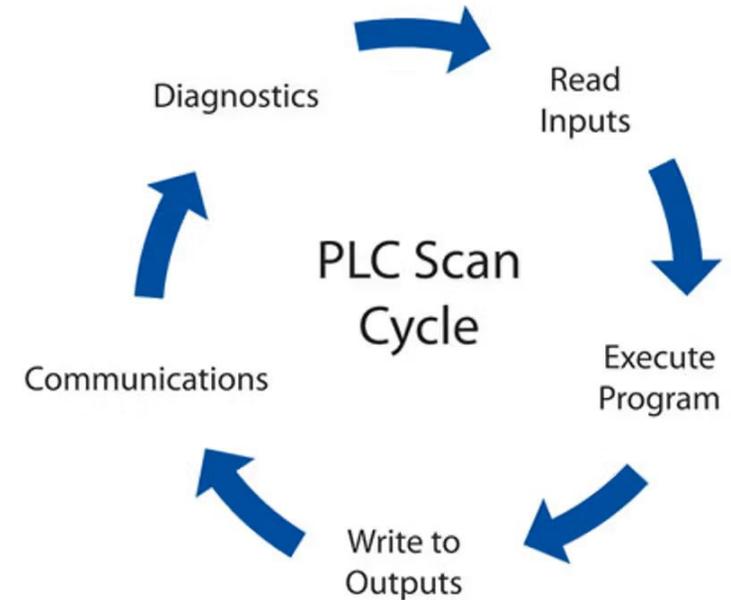

# Scan Cycle Time (IO)

---


- The number of IO devices you have effects the scan time (more devices = longer scan time)
- The type of inputs effects scan times as well (analogue devices often take longer)
- These effect the input and output parts of the scan cycle

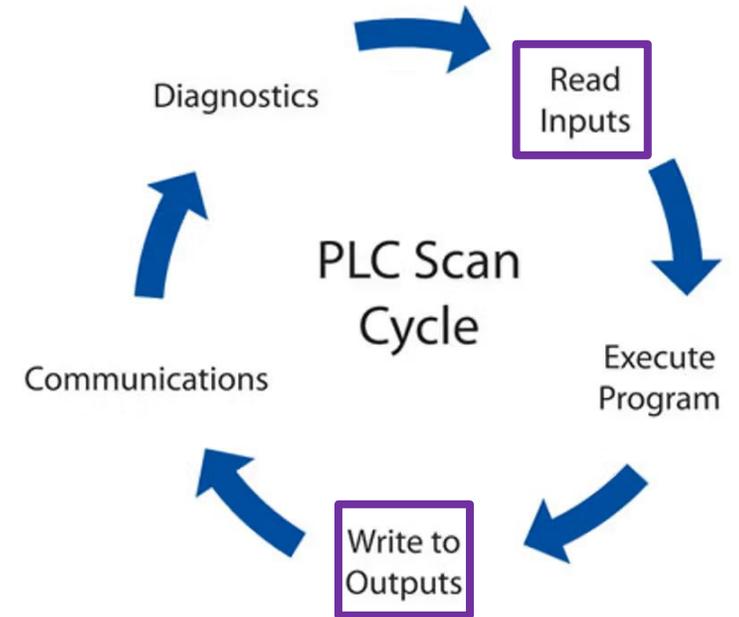

# Scan Cycle Time (Complexity)

---


- The complexity of the user programmed logic will drastically effect scan time
- More instructions = longer scan times
- Heavy use of math operations and loops will increase time as they're harder to run
- They effect the execute part of the scan cycle

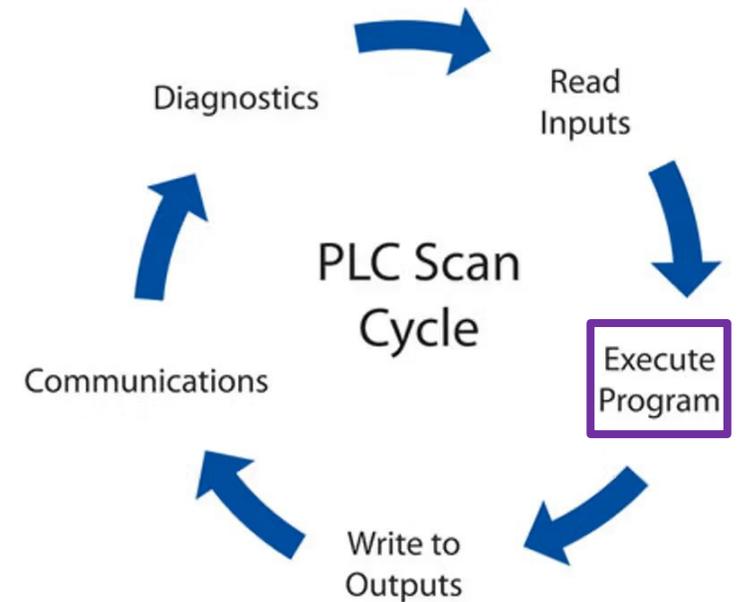

# Scan Cycle Time (Processing Power)

---


- The amount of processing power drastically effects the speed of the scan cycle
- Lower powered CPUs will result in a slower cycle
- In general, the older a CPU the less processing power it will have
- Mostly effects the execute part of the scan cycle however does have a small effect over the whole cycle

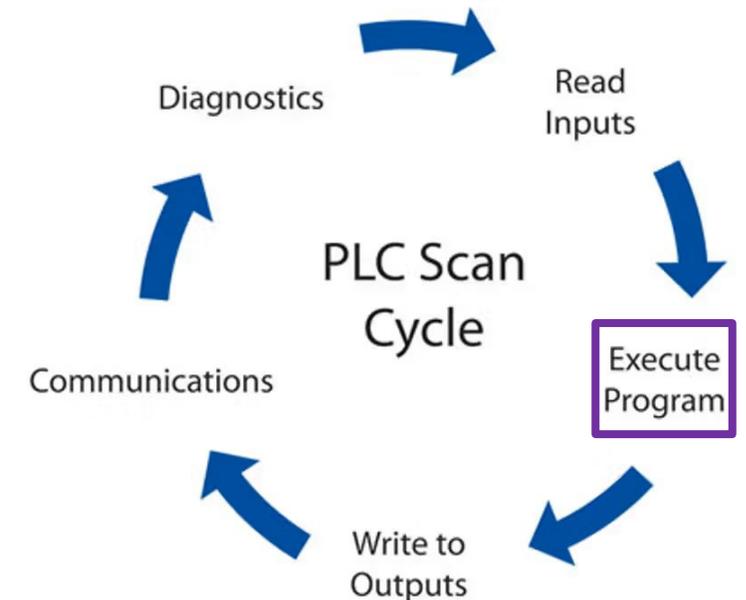

# Scan Cycle Time (Time dependant)

---

- Components like Timers, Counters and communication blocks will take more CPU cycles
- This means using these components too much will slow down the scan cycle
- This effects the execute part of the cycle

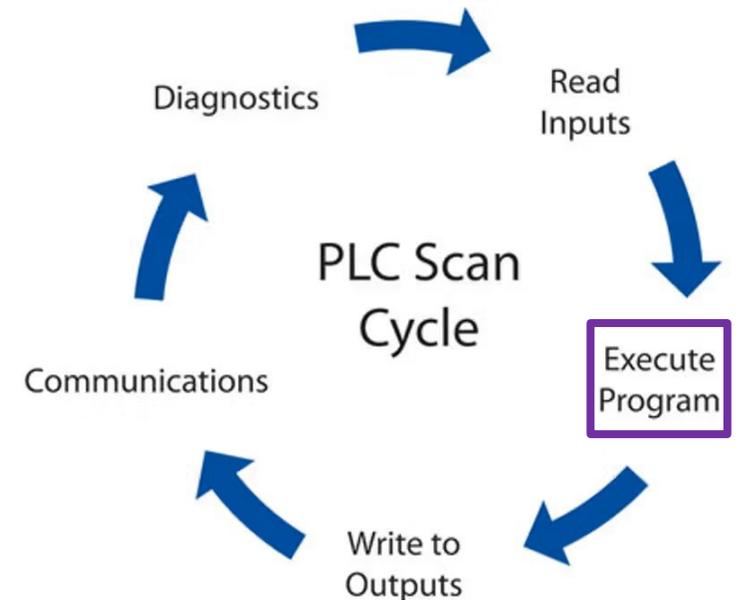

# Scan Cycle Time (Communication)

---

- Plugging in external devices which the PLC must communicate with will slow the cycle drastically
- This is because it takes time for the PLC to send messages to and from the external device
- This of course effects the House Keeping (communications) part of the cycle

